

iWater

Green Factor Tool for climate smart and diverse city blocks

Viliina Evokari 8.5.2018



Integrated Stormwater Management
www.integratedstormwater.eu



EUROPEAN UNION
European Regional Development Fund



Contents of presentation

- Background
 - What is the Green Factor
 - Why should we use it?
- Green Factor in Helsinki
 - Development
 - Green factor in Helsinki city planning
- The Green Factor Excel tool
 - How does it work?



Picture: Viliina Evokari

Green Factor Tool

Background



Integrated Stormwater Management
www.integratedstormwater.eu



EUROPEAN UNION
European Regional Development Fund



What is the Green Factor


A practical tool for urban planning

→ ensures sufficient green infrastructure when building new blocks in a dense urban environment

$$\text{Green factor} = \frac{\text{Scored green area}}{\text{Lot area}}$$



Benefits of green infrastructure

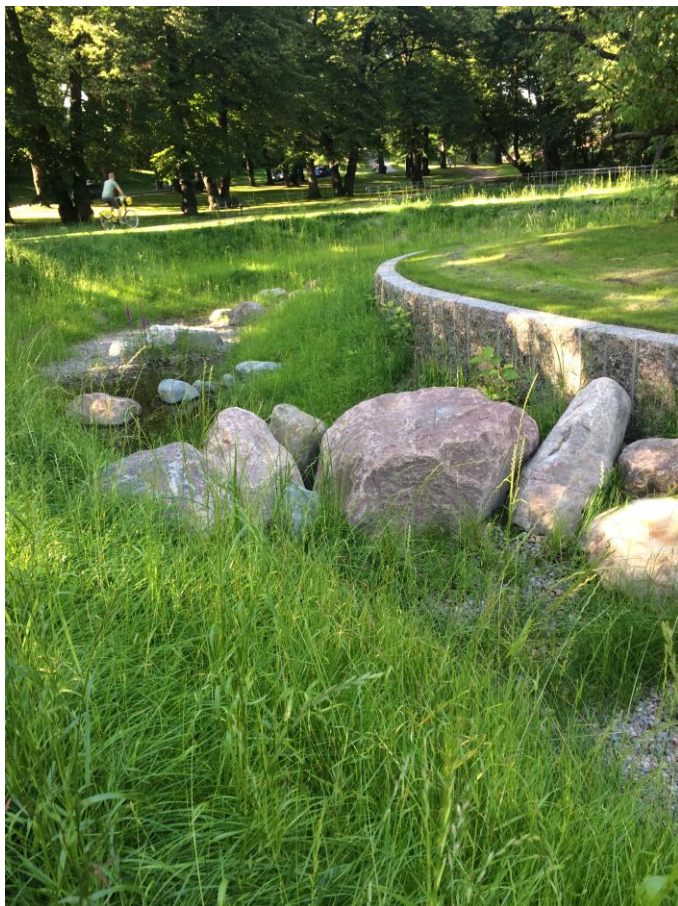

A vital role in the adaptation to climate change

- Reduces the risk of flooding
- Reduces air pollution
- Reduces noise
- Reduces soil erosion
- Cools urban heat islands of built environments
- Reserves carbon dioxide
- Increases wellbeing in urban environments

Picture: Elisa Lähde

Green Factor in Helsinki



EUROPEAN UNION
European Regional Development Fund




Helsinki Green Factor

- Developed in the Climate-proof City (ILKKA) – Tools for Planning project in 2013 (EPECC and FCG)
- Updated in the iWater project 2017
- Other Green Factor methods : Berlin, Malmö, Stockholm, Seattle and Toronto
- Adopted in 6 iWater cities: Riga, Jelgava, Tartu, Turku, Gävle and Söderhamn



Green Factor in Helsinki city planning

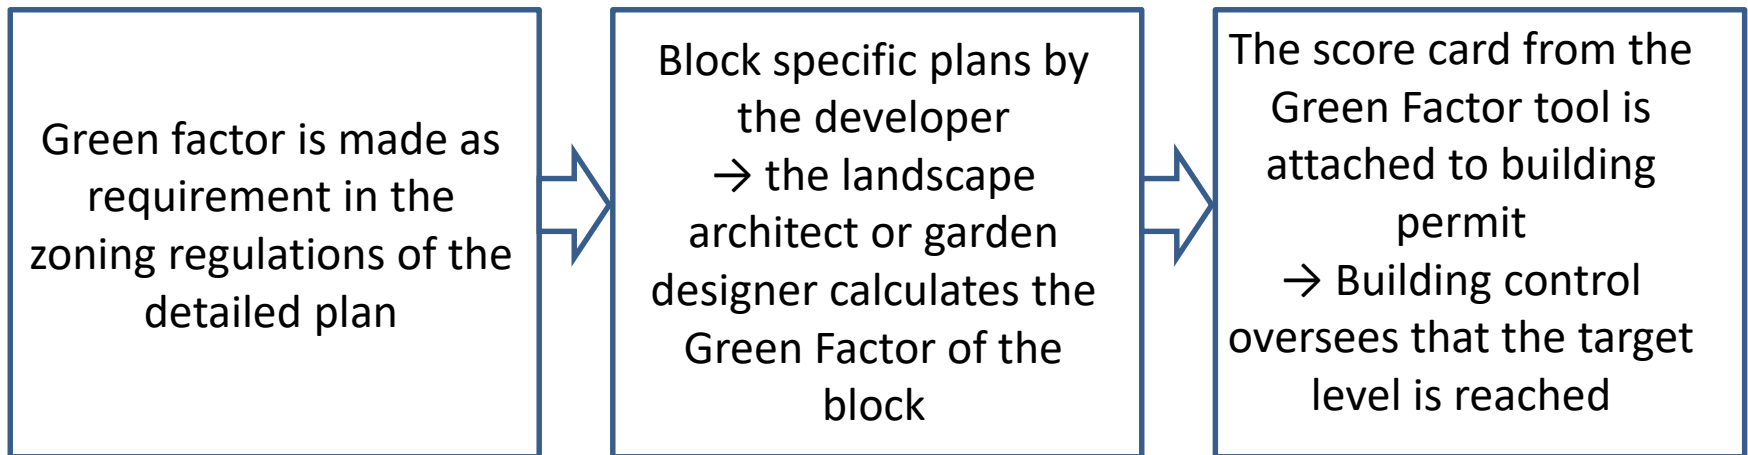

The target levels are defined in the Green Factor tool

Target level depends on the land use type

The Green Factor Excel Tool



EUROPEAN UNION
European Regional Development Fund



Basic structure of the tool

Five Excel-sheets

- Instructions
- Limitations
- Green Factor (elements)
- Results
- iWater Toolsheets

The tool guides the user step-by-step through the calculation.



EUROPEAN UNION
European Regional Development Fund



Limitations

The land use type defines the target level

Target level
0,9
Block ID
33397
Lot ID
1
Site area, m ²
4910
Building footprint, m ²
2096
Floor area, m ²
7000
Ratio of building footprint to site area
0,4
Ratio of floor area to site area
1,4

Limitations	No.	Question	Response
Land use	1	Residential	<input checked="" type="radio"/>
		Services and Offices	<input type="radio"/>
		Commercial	<input type="radio"/>
		Industrial/logistics	<input type="radio"/>
Yard type	2	Share of rooftop courtyard over 50 %	<input checked="" type="radio"/> Yes <input type="radio"/> No
Drainage system	3	Can the site be connected to a separate drainage system?	<input type="radio"/> Yes <input checked="" type="radio"/> No
Surrounding region	4	Is there a green corridor comprising a nature reserve/body of water/natural vegetation located within ≤ 50 m of the site?	<input checked="" type="radio"/> Yes <input type="radio"/> No
Soil/groundwater	5	Is there at least 1 m of permeable soil between surface and any impermeable soil, bed rock or groundwater level?	<input checked="" type="radio"/> Yes <input type="radio"/> No
Stormwater management solutions	6	What is the estimated average/effective depth ¹⁾ of a detention/retention element ²⁾ ? (Area * Depth = estimated capacity)	0,3
	7	What is the estimated average/effective depth ¹⁾ of a biofiltration element? (Area * Depth = estimated capacity)	0,25
	8	If it is possible to provide a share of the necessary storm water retention capacity outside the block/lot, how big is the share (%)?	20

Green Factor (elements)

40 different elements

Five element groups:

- Preserved vegetation and soil
- Planted/new vegetation
- Pavements
- Stormwater elements
- Bonus elements



Element group	Element description
Preserved vegetation and soil	Preserved large (fully grown > 10 m) tree in good condition, at least 3 m (25 m ² each)
	Preserved small (fully grown ≤ 10 m) tree in good condition, at least 3 m (15 m ² each)
	Preserved tree in good condition (1.5–3 m) or a large shrub (3 m ² each)
	Preserved natural meadow or natural ground vegetation
More info	Preserved natural bare rock area (at least partially bare rock surface, not many trees)
Planted/new vegetation	Large tree species, fully grown > 10 m (25 m ² each)
	Small tree species, fully grown ≤ 10 m (15 m ² each)
	Large shrubs (3 m ² each)
	Other shrubs
	Perennials
	Meadow or dry meadow
	Cultivation plots
	Lawn
More info	Perennial vines (2 m ² each)
	Green wall, vertical area
Pavements	Semipermeable pavements (e.g. grass stones, stone ash)
More info	Permeable pavements (e.g. gravel and sand surfaces)
	Impermeable surface (calculated automatically)
Stormwater management solutions	Rain garden (biofiltration area) with a broad range of layered vegetation
	Intensive green roof / roof garden, depth of substrate 20 – 100 cm
	Semi-intensive green roof, depth of substrate 15 – 30 cm
	Extensive green roof, depth of substrate 6–8 cm
	Infiltration basin or swale covered with vegetation or aggregates (no permanent pool of water)
	Infiltration pit (underground)
	Pond, wetland or water meadow with natural vegetation (permanent water surface at least partially remains moist)
	Retention or detention ¹ basin or swale covered with vegetation or aggregates (permeable soil)
More info	Retention or detention ¹ pit, tank or cistern (underground, notice units: volume!)
	Biofiltration basin or swale
Bonus elements, max score 1 per category	Capturing stormwater from impermeable surfaces for use in irrigation or directing it in a controlled way
	Directing stormwater from impermeable surfaces to constructed water features, such as ponds
	Shading large tree (25 m ² each) on the south or southwest side of the building (especially deciduous trees)
	Shading small tree (15 m ² each) on the south or southwest side of the building (especially deciduous trees)
	Fruit trees or berry bushes suitable for cultivation (10 m ² each)

iWater Toolsheet

Brief descriptions of selected stormwater elements


Green roofs
Green roofs comprise a multi-layered system, which covers the roof of a building or podium structure with vegetation cover/landscaping. Green roofs reduce most effectively the volume of run-off and attenuate peak flows through processes of retention and evapotranspiration from short, mild storm events. These roofs consist of a substrate or growing medium, plant materials, and a range of insulation and waterproofing membranes. The quality of green roofs can vary from very thin moss roofs to intensive roof top gardens. Even if plants are chosen for their lower maintenance requirements, they still need occasional inspection, weeding and irrigation. Furthermore, these roofs add additional thermal insulation as well as potentially lower the heating and cooling costs for buildings. They also significantly reduce the heat reflected by building rooftops compared to conventional roofing materials.



Green walls
Green wall is an all-encompassing term that is used to refer to all forms of vegetated wall surfaces. These include green facade (plants growing onto and over specially designed supporting structures), living walls (distinct wall panels that include growing medium or liquid nutrient), and landscape walls (exterior living structures used to delineate boundaries, such as hedgers). Green walls include most of the benefits of green roofs as they naturally absorb, filter and evaporate stormwater. These walls can also reduce sound reflection, air pollution and regulate microclimate through shading. Similar to a garden, a green wall requires constant maintenance. The most important aspect of the maintenance is ensuring that plants are not suffering under or over watering. Plants must be occasionally pruned, fertilized and weeded if necessary, and sometimes plants will need to be replaced.



Permeable surfaces
Permeable (or pervious or porous) pavement allows water to flow vertically through hard, paved surfaces. Permeable paving aids in run-off reduction by allowing for retention and infiltration. This system provides the structural support of conventional pavement and can be used in areas, such as parking lots, plazas, and walkways where hard surfaces are required. The water can be temporarily stored before infiltration to the ground, reused, or discharged to a watercourse or other drainage system. Surfaces with an aggregate sub-base can provide good water quality treatment. There are many different types of porous surfaces, including pervious asphalt, pervious concrete, and interlocking pavers. Interlocking pavers function slightly differently from pervious concrete and asphalt. Rather than allowing the water to penetrate through the paving, pavers are spaced apart with gravel or grass in between to allow for infiltration. By utilizing areas that are already programmed for human or vehicular use for run-off reduction and stormwater management, permeable paving can reduce the amount of site area needed for additional structural management facilities, and add value to a property by preserving buildable space.



(Bio)swale
Vegetated swales, also known as bioswales, are gently sloped, planted channels for treating and conveying stormwater. Vegetated swales convey stormwater away from the infrastructure, such as sidewalks, roadways, parking lots, and building foundations. They differ from conventional channelling systems as they combine conveyance with stormwater treatment. In contrast to concrete-lined swales and pipes, vegetated swales slow stormwater velocity, allow for evapotranspiration, and remove debris while enhancing sediment dropout and infiltration. In order to infiltrate stormwater in swales, the soil must be permeable or there can be sand filter layers added. A swale does not require any other construction than the surface design, the growth layer and the installation of vegetation. An underground drainage layer is used to convey extra water low and if the soil is not permeable. The drainage layer is constructed at the bottom of the structure. Plants used in the swale should tolerate standing water at the bottom of the swale. Plants should be easily maintained. It would also be good to use a variety



Canals and rills
Canals and rills are open surface water channels with hard edges. They can have a variety of design and materials to enliven urban landscape, including the use of planting to provide both enhanced visual appeal and water treatment.



Results – Score card

Score card

Date 2.2.2018

Block ID

33397

Lot ID

1

Green Factor calculation

Green Factor	0,90
Target level	0,90

Elements included in the green factor

Element group	Elements filled	Total number of elements in group
Preserved vegetation	no elements!	5
Planted vegetation	7	10
Pavements	2	2
Stormwater solutions	2	9
Bonus elements	8	12
Total	19	38

Comments


Achieved Green Factor

Amount of stormwater handled on the lot


Results are given in graphics and tables

Stormwater volume m³	
33,1	
Average runoff coefficient C	Possibility to retain stormwater outside block/lot
0,7	Yes
Necessary retention vol. m ³ on the lot	
26,5	
Retention volume of chosen elements m ³	Remaining retention demand m ³
28,0	0,0
Share of total impermeable surface	
58 %	


Share of total weighted area, %

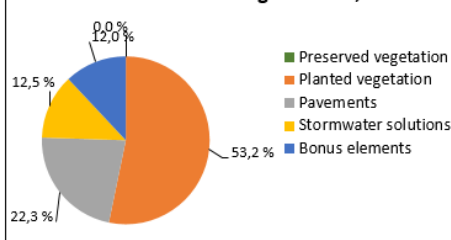

Weighting of different categories in the green factor, %

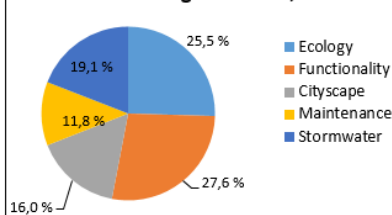

Element groups (% of total number of chosen elements)

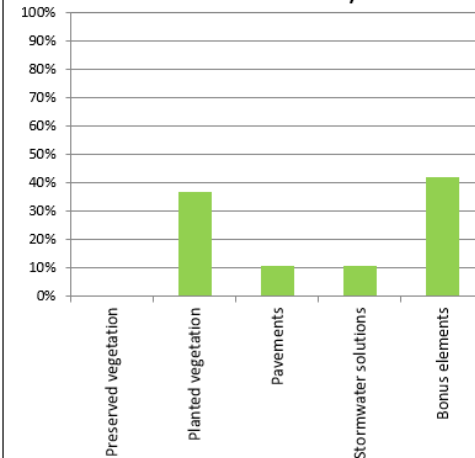

Green Factor materials



DEVELOPING THE CITY OF HELSINKI GREEN FACTOR METHOD

Report summary



English summary of the original report in Finnish Viherrakennusmenetelmän kehittäminen Helsingin kaupungille by Eina Inkiläinen (EPECC), Topi Tiihonen (EPECC) and Eeva Eitsi (FOG)

City of Helsinki Environment Centre
Helsinki 2016

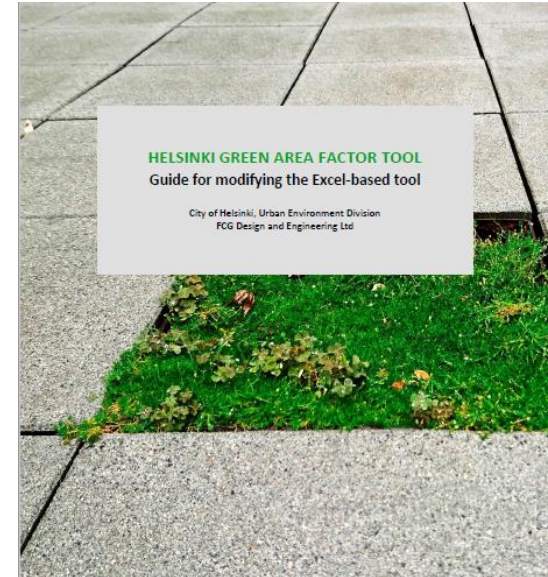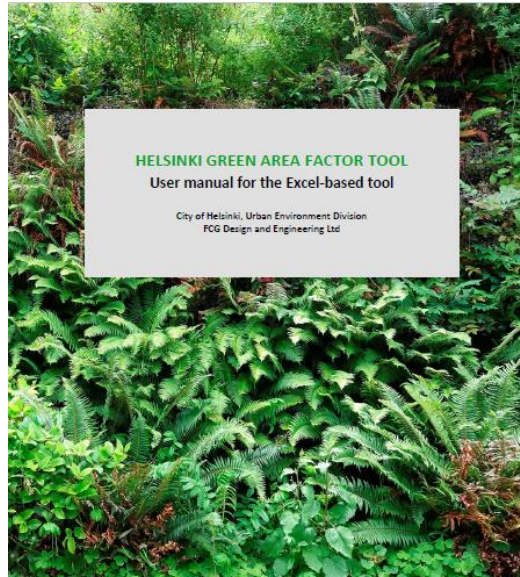

www.integratedstormwater.eu/content/green-area-factor-and-other-tools



Take home message

Green Factor is a user friendly and flexible planning tool that helps cities adapt to climate change by ensuring sufficient green infrastructure in new building blocks.



Pictures: Elisa Lähde

Thank you!

Viliina Evokari
iWater project manager
The City of Helsinki
+358 40 519 7544
viliina.evokari@hel.fi



Integrated Stormwater Management
www.integratedstormwater.eu



EUROPEAN UNION
European Regional Development Fund

